

LGMG

H735


TELEHANDLER




LGMG TELEHANDLER

SPECIFICATIONS

MODELS	H735	
Measurements	Metric	Imperial
A Max. Lifting Height	7m	23'
Max. Outreach	3.9m	12'10"
B Overall Length	4.99m	16'4"
C Overall Width	2.33m	7'8"
D Overall Height	2.34m	7'8"
E Wheelbase	2.85m	9'4"
Ground Clearance	0.45m	1'6"
PRODUCTIVITY		
Max. Capacity	3,500kg	7,716 lbs
Gradeability-Unladen	45%	
Min. Turning Radius	3.9m	12'10"
Tilt Angle	±5°	
Drive /Steering Mode	4 Wheel Drive / 4 Wheel Steer	
Primary Boom Ascending Time	7.51s	
Primary Boom DescendingTime	5.57s	
Boom Extending Time	6.93s	
Boom Retracting Time	5.32s	
Forward - First Gear Travel Speed	9km/h	5.6mph
Forward - Second Gear Travel Speed	27km/h	16.8mph
Backward - First Gear Travel Speed	9km/h	5.6mph
Backward - Second Gear Travel Speed	27km/h	16.8mph
Braking	Multi-disc wet brake of front and rear axles	
Standard Tyres	400/80 R24	
ENGINE		
Manufacturer	Kubota	
Rated Power	54.6kW	73.2hp
Max. Torque	289.3N.m	213.4 lb.ft
Displacement	3,331ml	203.3 cu.in
Fuel Tank Capacity	100L	26.4gal
Maximum traction force	43kN	
HYDRAULIC SYSTEM		
Working pump displacement	113 l/min	30 US gpm
Hydraulic Oil Capacity	100L	26.4gal
WEIGHT		
Machine Weight	7,000kg	15,432 lbs

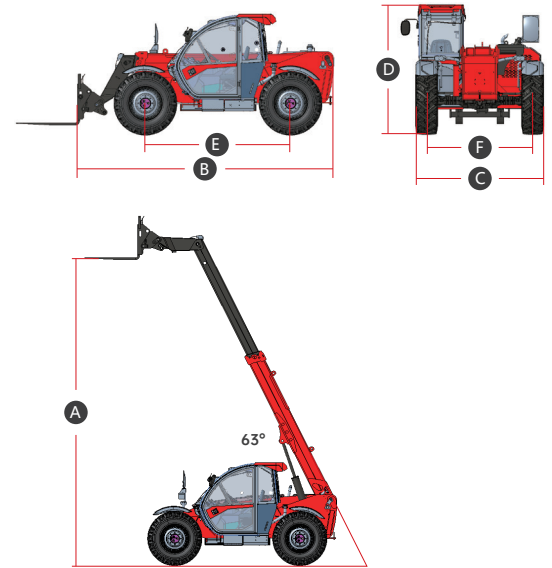

ROUGH TERRAIN LOAD CHART

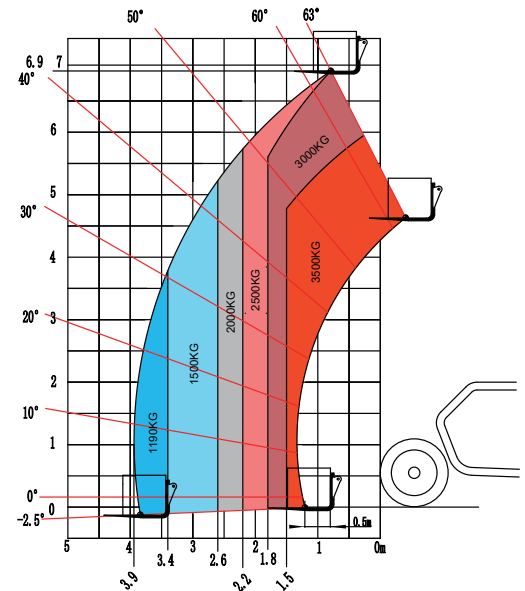

Please contact LGMG or a local dealer for more details.

LGMG reserves the right to change technical data without prior notice. All photos and pictures in this brochure are for promotional purposes only.

LINGONG HEAVY MACHINERY CO., LTD.

Address: No. 2676, Kejia Road, Jinan, Shandong, China

Email: sales@lmg.com.cn Tel: +86 531 6787 9283

www.lmglifts.com



RELIABILITY IN ACTION