


LGMG

SR2669E

ELECTRIC RT SCISSOR LIFT

- The large platform with high capacity maximizes productivity.
- Battery powered, zero emission and quiet drive mean this machine is environmentally friendly.
- Equipped with oscillating axles that provide excellent performance in soft and rough terrain conditions.
- Optional hydraulic outriggers deliver a better solution on uneven ground.
- Intelligent self-diagnostic system for quick troubleshooting.

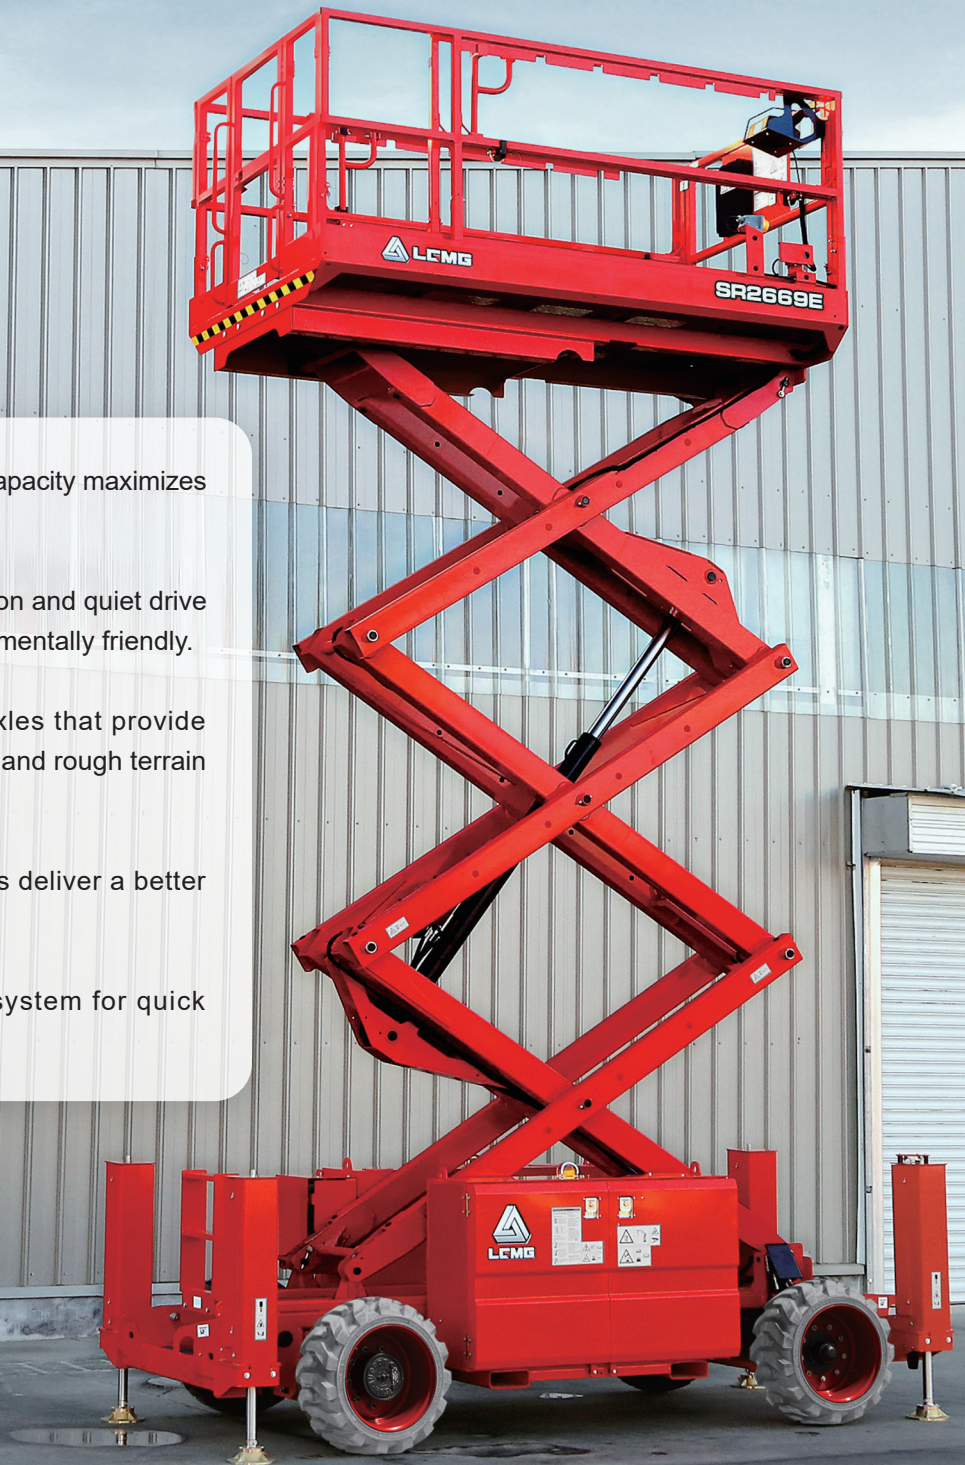

LGMG Electric RT Scissor Lift

SPECIFICATIONS

MODELS	SR2669E (SR0818E)	
Measurements	Imperial	Metric
Work Height Max.	31'10"	9.7m
A Platform Height - Raised	25'3"	7.7m
B Platform Height - Stowed	4'8"	1.41m
C Platform Length	9'2"	2.79m
D Platform Width	5'3"	1.6m
E Overall Length	12'4"	3.76m
F Overall Width	5'10"	1.79m
G Overall Height - Rails up	8'6"	2.58m
Overall Height - Rails down	6'4"	1.92m
H Extension Deck	5'	1.52m
I Wheelbase	7'6"	2.29m
Ground Clearance-Center	9"	0.23m

PRODUCTIVITY

Max. Platform Occupancy	4 (in) / 4 (out)	
Platform Capacity	1,499 lbs	680kg
Platform Capacity - Extension	310 lbs	140kg
Drive Height	Full Height	
Gradeability - Stowed	40%	
Min. Turning Radius	15'7"	4.75m
Raise/Lower Speed	35 / 30s	
Brakes	Rear-wheel brake	
Drive Mode	4x2	
Tire Type	Foam-filled Non-marking	
Tire Size	26"x11"	663x283mm
Ground Pressure, Tyres	71.4 psi	492.07 kPa

POWER

Power Source	48V 315Ah	
--------------	-----------	--

HYDRAULIC SYSTEM

Hydraulic Oil Volume	13.21gal	50L
----------------------	----------	-----

WEIGHT


Machine Weight	9,237 lbs	4,190kg
----------------	-----------	---------

STANDARD FEATURES

Proportional control	Emergency stop device
Foldable guardrail	Tilt alarm with lift cut-out
Emergency descent	Overload sensing system
Manual brake release	Intelligent diagnostic system
Oscillating axle	Descent alarm with flashing beacon
Self-lock entry gate	Foam-filled non-marking tires
All motions alarm	

OPTIONAL

AC power to platform	Solid tires
Telematics	Solid non-marking tires
Auto-leveling outriggers	Foam-filled tires
Biodegradable hydraulic oil	

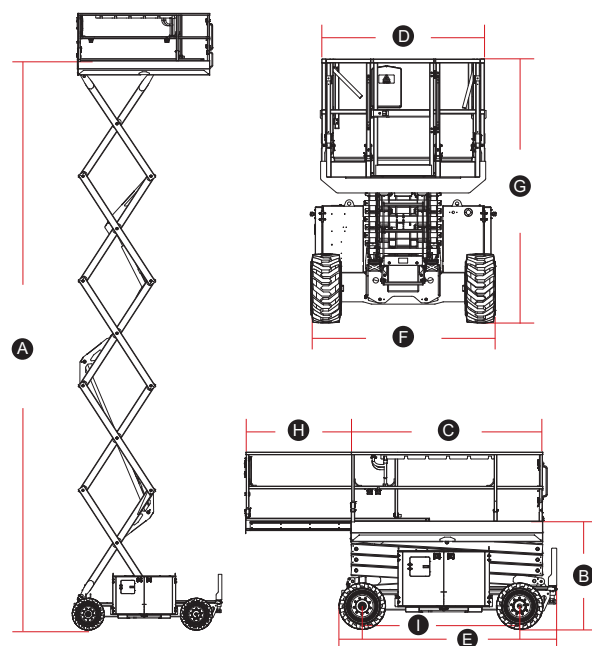

Please contact LGMG or a local dealer for more details.

LGMG reserves the right to change technical data without prior notice. All photos and pictures in this brochure are for promotional purposes only.

LGMG North America Inc.

Address: 4105 Live Oak Drive, Suite 100, The Colony, Texas 75056 United States
Email: sales@lmgna.com Tel: +1 833 288 5464

www.lmgna.com



RELIABILITY IN ACTION